

Starrett®



HDV300

HDV400

HDV500

KMic-KMR

MV SERIES

MVR SERIES

AV SERIES

AVR SERIES

AV300+

AV350+

AV300+ MICRO

LF SERIES

VISION SYSTEMS

METROLOGY **S**OLUTIONS

Starrett®

AVR200
AVR300




CNC AUTOMATIC VISION METROLOGY SYSTEMS

ACCURATE, FLEXIBLE AND IDEAL FOR REPETITIVE MEASUREMENTS



The Starrett AVR Series CNC automatic vision metrology systems are ideal for repetitive measurements and automatic comparison to CAD files. They are available with dedicated 6.5:1 or 12:1 zoom optics or a quick-change bayonet lens mount which accepts a choice of six interchangeable telecentric lenses for micron-level resolution and optical distortion down to 0.001% for accurate field-of-view (FOV) measurements. The FOV can encompass an entire small part up to 51 x 38mm or a feature of a larger part and be seamlessly integrated with stage motion to measure parts with a length up to 200mm (AVR200) or 300mm (AVR300). Systems are also touch probe compatible.

AVR Series hardware features include a granite base for maximum stability, recirculating ball linear guides for smooth and precise stage motion, and full CNC control for high throughput. All electronics other than the PC are housed in the Z-column, ensuring an integrated system with minimal external wiring.

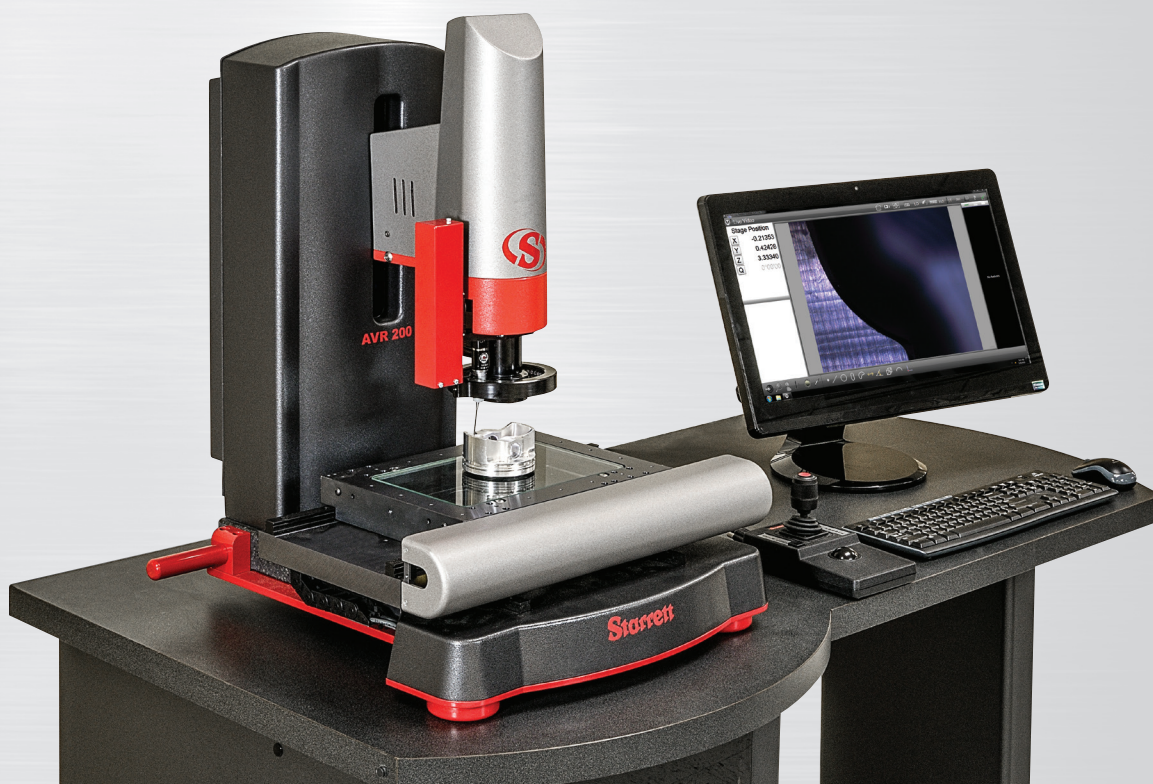

AUTOMATIC VISION METROLOGY SYSTEMS

The AVR Series consists of two models for 200 x 100 x 200mm or 300 x 200 x 200mm of X-Y-Z travel. Both provide motorised travel and zoom, which can be under full software control (CNC operation), or under manual control via a joystick and trackball. Available with interchangeable telecentric lenses for field-of-view (FOV) measurements or with dedicated optical zoom, these new CNC vision metrology systems are easy to use, versatile and accurate. They are equally suitable for individual measurements, for high-speed "go-no-go" testing of small parts within the FOV, and for automatic testing using stage motion to measure parts up to 200mm on the AVR200 and up to 300mm on the AVR300. Systems are also touch probe compatible.

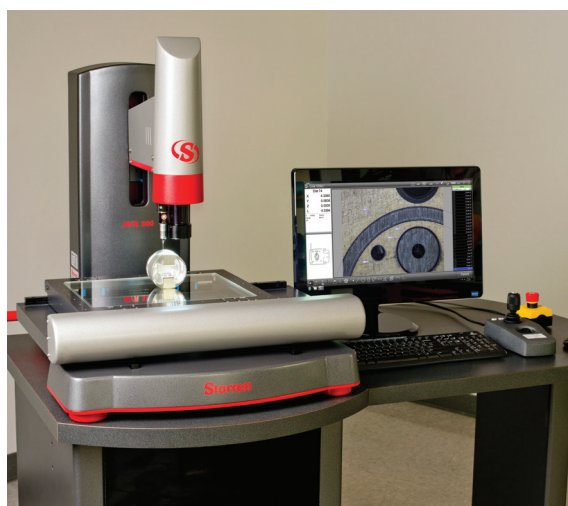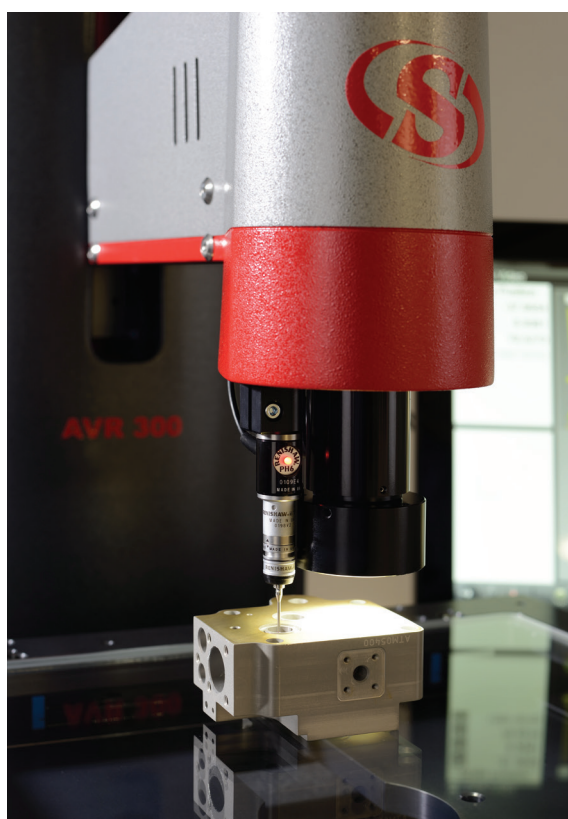

FEATURES

- X-Y travel for AVR200: 200 x 100 mm
- X-Y travel for AVR300: 300 x 200 mm
- Z travel: 200 mm with 2.0X auxiliary lens
- Full CNC X-Y-Z positioning or motorised manual positioning using a pendant with joystick and trackball
- Windows® 10 Professional operating system for network connectivity
- MetLogix™ M3 CNC measuring software
- Video edge detection (VED)
- Field-of-view (FOV) measurements integrated with stage motion
- Renishaw scales for 0.1µm of X,Y and Z axis
- Accuracy: 1.9µm + 5L/1000 for X and Y, 2.5µm + 5L/1000 for Z
- Colour digital video camera
- Collimated LED sub-stage illumination
- Ring light LED surface illumination
- Granite base
- H x W x D for AVR200: 851 x 520 x 641mm
- H x W x D for AVR300: 825 x 673 x 855mm

OPTIONS

- Dedicated 6.5:1 or 12:1 CNC zoom optics on AVR200 and AVR300
- Quick-change bayonet lens mount for telecentric optics
- Interchangeable bayonet mount telecentric optics with magnifications of 0.30x, 0.50x, 0.80x, 1.0x, 2.0x and 4.0x
- 0.5x, 1.5x and 2.0x auxiliary lenses for zoom optics
- Renishaw touch probe kit
- Quadrant LED surface illumination for zoom optics
- DXF/FOV option for automatic comparison to CAD designs
- Modular workstation system
- Calibration standards
- Part fixtures and work holding devices

OPERATOR INTERFACE

The AVR Series is built around a 24" touch screen and PC which runs MetLogix™ M3 CNC software under Windows® 10 Professional. M3 software supports 3-axis measurements and 2D geometrical constructs (points, lines, angles, rectangles). The screen displays a live video image of the part plus geometry tools and digital readings. The part image can be resized using pan and zoom, and measurements can be taken by simply tapping a feature on the screen. With the M3 DXF/FOV option CAD files can be imported over a network and be automatically compared to the actual part.

FEATURE	24" COLOUR TOUCH-SCREEN MONITOR AND PC WITH M3 SOFTWARE
24" (60cm) colour graphic touch-screen monitor and PC	x
M3 controller housed in Z column	x
Full CNC control of X-Y-Z position and optical zoom	x
Manual X-Y-Z position control via joystick and trackball	x
Windows® 10 Professional operating system	x
Wi-Fi network connectivity	x
Video edge detection	x
X-Y-Z measurements	x
2D geometric constructs plus height	x
FOV measurements integrated with X-Y stage motion	x
CAD file import and export	x
Automatic comparison of measurements to CAD files*	x
Software developer	MetLogix™

*Standard on FOV models only.



AVR OPTICS

The AVR CNC Vision Metrology Systems are ideal for repetitive and automatic measurements as well as automatic comparison to CAD files. The AVR200 and AVR300 models are available with either dedicated 6.5:1, 12:1 zoom optics or a quick-change bayonet lens mount on the FOV models which accepts a choice of six interchangeable telecentric lenses for micron-level resolution and optical distortion down to 0.001% for accurate field-of-view (FOV) measurements. The lens magnifications can encompass an entire small part up to 51 x 38mm or a feature of a larger part and be seamlessly integrated with stage motion to measure parts with a length up to 200mm (AVR200) or 300mm (AVR300).

OPTICAL PARAMETER	TELECENTRIC OPTICS (FOV MODELS)						DEDICATED ZOOM OPTICS	
							6.5:1	12:1
Optical Magnification on CCD	0.30x	0.50x	0.80x	1.0x	2.0x	4.0x	0.47x to 3.0x	0.4x to 4.7x
Total Magnification on Monitor	13x	22x	36x	45x	89x	178x	31x to 198x	26x to 310x
Field of View Width, mm	24	14	9	7	3.5	1.8	10 to 1.6	12 to 1
Working Distance, mm	110	110	110	110	110	110	88	88
Camera CCD, mm	28.6	28.6	28.6	28.6	28.6	28.6	8.5	8.5


INTERCHANGEABLE LENSES




AVR200/300 WEIGHT AND DIMENSIONS


	AVR200	AVR300
Net Weight:	90kg	115kg
Shipping Weight:	115kg	135kg

AVR200 | 851 x 520 x 641mm

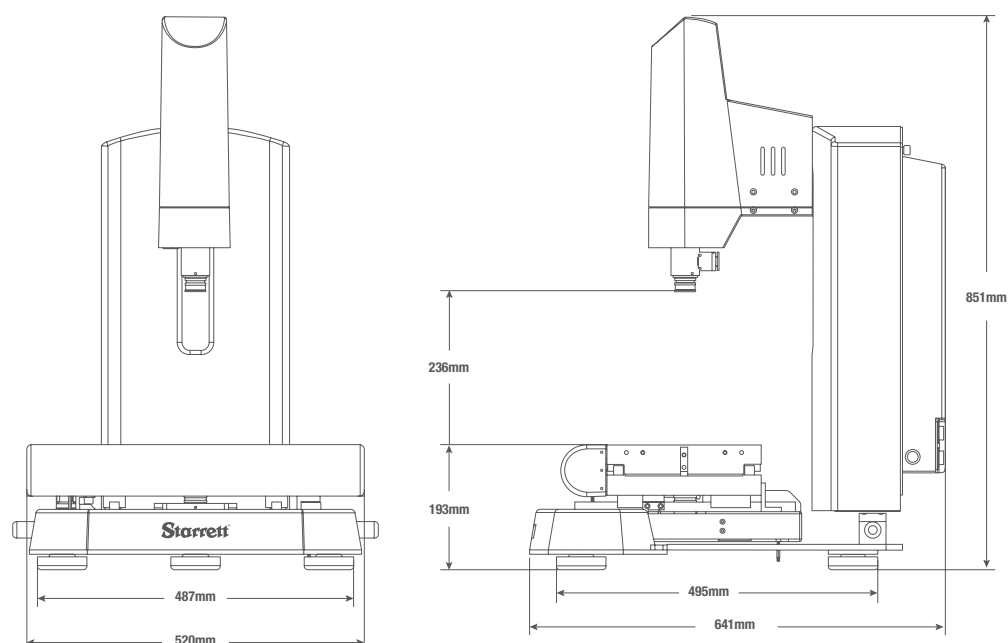

AVR300 | 825 x 673 x 855mm

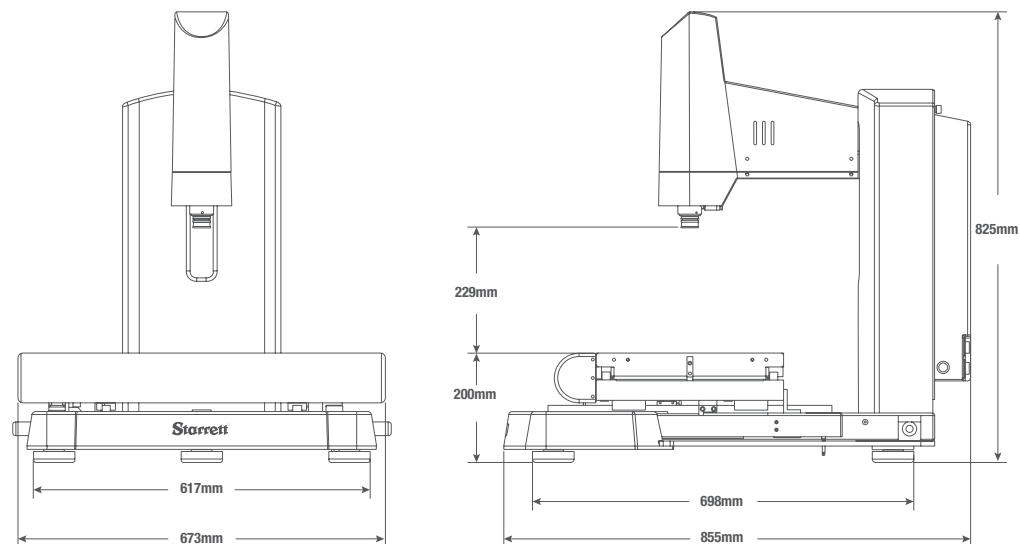

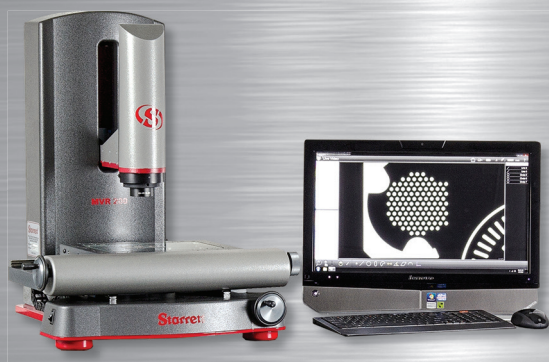

Starrett®



HDV300

HDV400

HDV500

KMic-KMR

MV SERIES

MVR SERIES

AV SERIES

AVR SERIES

AV300+

AV350+

AV300+ MICRO

LF SERIES

VISION SYSTEMS

Your Starrett distributor is:

The L. S. Starrett Company Ltd

Jedburgh, Scotland, TD8 6LR

T: 00 44 (0)1835 863501

F: 00 44 (0)1835 863018

sales@starrett.co.uk | www.starrett.co.uk

970E, Issue 04/17

METROLOGY  SOLUTIONS